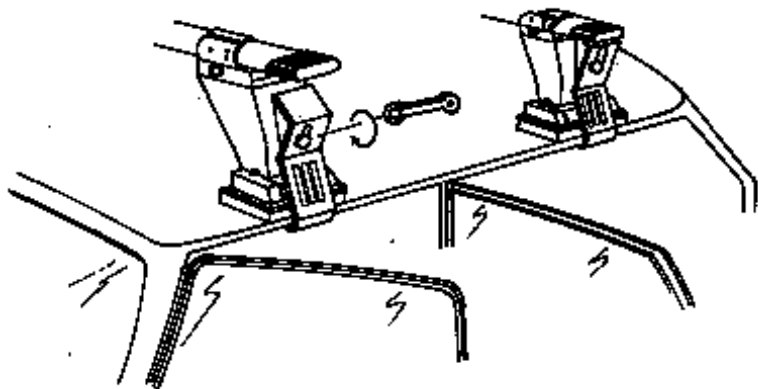

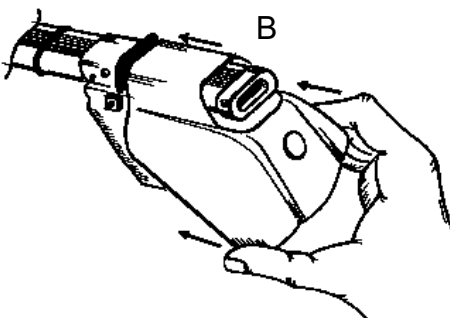
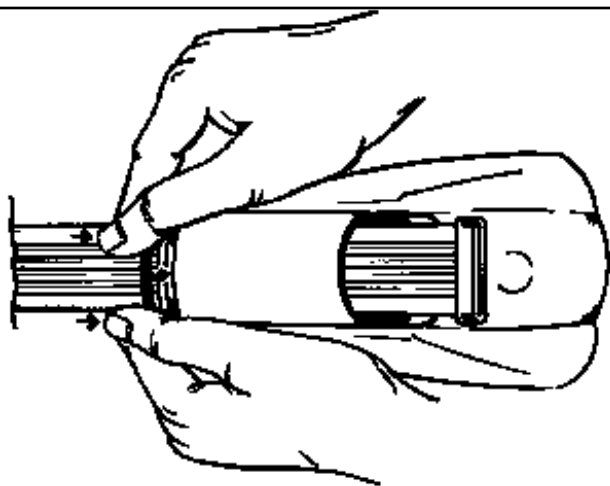


8**AVVITARE**

TO SCREW
 APRETAR
 FESTSCHRAUBEN
 VISSER
 VASTSCHROEVEN
 MEGHÚZNI
 WKRECIC
 PRIVITI

**9****OPTIONAL****INSERIRE**



INSERT
 CUBRIR
 STOPFEN
 ENFILER
 BEVESTIG
 TOLJA FEL
 NALOZIC
 VSTAVITI

**10****74co**

ISTRUZIONI DI MONTAGGIO - FITTING INSTRUCTIONS - INSTRUCCIONES PARA SU MONTAJE -
 MONTAGEANWEISUNGEN - INSTRUCTIONS DE MONTAGE - MONTAGE INSTRUCTIES -
 SZERELÉSI UTASÍTÁS - INSTRUKCJA MONTAŻU - NAVODILA O MONTAŽI

“LOGICO”**1****MISURE PRECISE**


EXACT DIMENSIONS
 MEDIDAS CORRECTAS
 GENAUE MASSE
 MESURES EXACTES
 EXACTE AFMETINGEN
 PONTOS MÉRET
 DOKŁADNE WYMIARY
 TO»NE MERE

**ANTERIORE**

FRONT
 DELANTERO
 VORDERE
 AVANT
 VOORSTE G.
 ELÖRE
 SPREDAJ

**POSTERIORE**

REAR
 TRASERO
 HINTERE
 ARRIERE
 ACHTERSTE G.
 HÁTRA
 ZADAJ

**A**

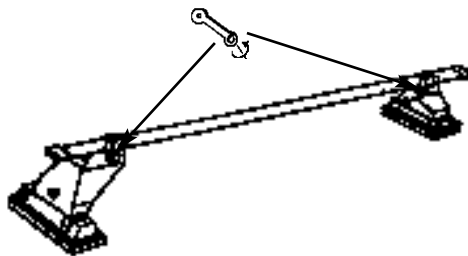
ANTERIORE
 FRONT
 DELANTERO
 VORDERE
 AVANT
 VOORSTE G.
 ELÖRE
 SPREDAJ

P

POSTERIORE
 REAR
 TRASERO
 HINTERE
 ARRIERE
 ACHTERSTE G.
 HÁTRA
 ZADAJ


FORD KUGA NO RAILS (08-12)	52 mm.	61 mm.
HONDA ACCORD (03-08)	124 mm.	124 mm.
HONDA ACCORD (08-14)	72 mm.	92 mm.
HONDA ACCORD TOURER NO RAILS (03-08)	118 mm.	126 mm.
HONDA CITY (03-08)	100 mm.	123 mm.
HONDA CIVIC 4P. SEDAN (05-12)	96 mm.	110 mm.
HYUNDAI i30 CW (12-17)	106 mm.	121 mm.
KIA RIO 5P. (12-17)	108 mm.	124 mm.
NISSAN JUKE (10-19)	88 mm.	107 mm.
NISSAN TIIDA 4A. SEDAN (04-12)	119 mm.	125 mm.

2

**AVVITARE (A FONDO)**


TO SCREW (DOWN)
 APRETAR (A FONDO)
 FESTSCHRAUBEN
 VISSER (À FOND)
 VASTSCHROEVEN
 MEGHÚZNI
 WKRECIC DO KONCA
 PRIVITI (DO KONCA)

3

**TAGLIARE**

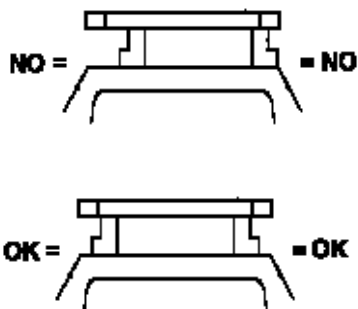
TO CUT
 CORTAR
 SCHNEIDEN
 COUPER
 SNIJDEN
 ELVÁGNI
 OBCIAC
 ODREZATI

4

**PULIRE IL TETTO**

CLEAN THE ROOF
 LIMPIAR EL TECHO
 DACH REINIGEN
 NETTOYER LE TOIT
 DAK SCHOONMAKEN
 TISZTÍTSA MEG A TETŐT
 WYCZYSCIC DACH
 O»ISTITI STREHO

5


**CENTRARE IL P. TUTTO SUL TETTO**

CENTRE THE UNIVERSAL BAR
 CARRIER ON THE ROOF
 CENTRAR EL PORTAEQUIPAJES
 SOBRE EL TECHO
 LASTENTRÄGER AUF DEM DACH
 ZENTRIEREN
 CENTRER LE TOIT AVEC LE
 PORTE-TOUT
 PLAATS DE UNIVERSELE DRAGER
 IN HET MIDDEN VAN HET DAK
 HELYEZZE KÖZÉPRE A RUDAKAT
 WYSRODKOWAC BAGAŻNIK NA DACHU
 CENTRIRATI PRTLJA»ENIK NA STREHO

6

MONTAGGIO GANASCINE

HOW TO ASSEMBLE THE CLAMPS
 COMO MONTAR LAS FIJACIONES
 ZUSAMMENBAU DER
 SPANNBACKEN
 MONTAGE CROCHET
 MONTAGE VAN DE KLEMMEN
 RÖGZITŐ FÜLEK
 MONTAZ SZCZEK MOCUJACYCH
 MONTA»EA NAPENJALNIKA

**ANTERIORE POSTERIORE**

FRONT DELANTERO VORDERE AVANT VOORSTE G. ELSŐ RÚD PRZOD SPREDAJ	REAR TRASERO HINTERE ARRIERE ACHTERSTE G. HÁTSÓ RÚD TYL ZADAJ
--	--

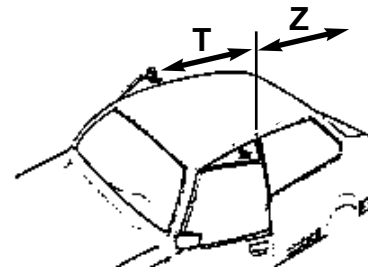
MODELLI AUTO

	N°	N°
<i>FORD KUGA NO RAILS (08-12)</i>	6	5
<i>HONDA ACCORD (03-08)</i>	5	5
<i>HONDA ACCORD (08-14)</i>	5	6
<i>HONDA ACCORD TOURER NO RAILS (03-08)</i>	5	6
<i>HONDA CITY (03-08)</i>	5	6
<i>HONDA CIVIC 4A. SEDAN (05-12)</i>	5	6
<i>HYUNDAI i30 CW (12-17)</i>	5	6
<i>KIA RIO 5P. (12-17)</i>	5	6
<i>NISSAN JUKE (10-19)</i>	5	6
<i>NISSAN TIIDA 4A. SEDAN (04-12)</i>	5	6

7

**MODELLI CON PREDISPOSIZIONE DELLA CASA AUTO:**

CARS WITH PRE-EXISTING FIXING POINT FROM MANUFACTURER
 MODELOS CON PREDISPOSICION DEL FABRICANTE
 AUTOS MIT VOM HERSTELLER VORGESEHENE BEFESTIGUNGSPUNKTE
 VOITURES AVEC POINTS DE FIXAGE PREVUS PAR LE CONSTRUCTEUR
 AUTO'S MET DOOR DE FABRIKANT VOORZIENE MONTAGEPUNTEN
 FELHELYEZÉS GYÁRTÓ ÁLTAL KIJELÖLT PONTRA
 SAMOCHODY Z PRZEWIDZIANYMI PUNKTAMI UMOCOWANIA
 MODELJI Z PREDVIDENIM LE»EI»EM S STRANI PROIZVAJALCA

**ANTERIORE**

FRONT
 DELANTERO
 VORDERE
 AVANT
 VOORSTE G.
 ELSŐ RÚD
 PRZOD
 SPREDAJ

POSTERIORE

REAR
 TRASERO
 HINTERE
 ARRIERE
 ACHTERSTE G.
 HÁTSÓ RÚD
 TYL
 ZADAJ

MODELLI AUTO

	200 mm.	500 mm.
<i>FORD KUGA NO RAILS (08-12)</i>	T	Z
<i>HONDA ACCORD (03-08)</i>	T	Z
<i>HONDA ACCORD (08-14)</i>	T	Z
<i>HONDA ACCORD TOURER NO RAILS (03-08)</i>	T	Z
<i>HONDA CITY (03-08)</i>	180 mm.	350 mm.
<i>HONDA CIVIC 4A. SEDAN (05-12)</i>	T	Z
<i>HYUNDAI i30 CW (12-17)</i>	T	Z
<i>KIA RIO 5P. (12-17)</i>	T	Z
<i>NISSAN JUKE (10-19)</i>	300 mm.	350 mm.
<i>NISSAN TIIDA 4A. SEDAN (04->12)</i>	230 mm.	440 mm.